



ISSUE	DESCRIPTION	DATE
V00	初始版本	

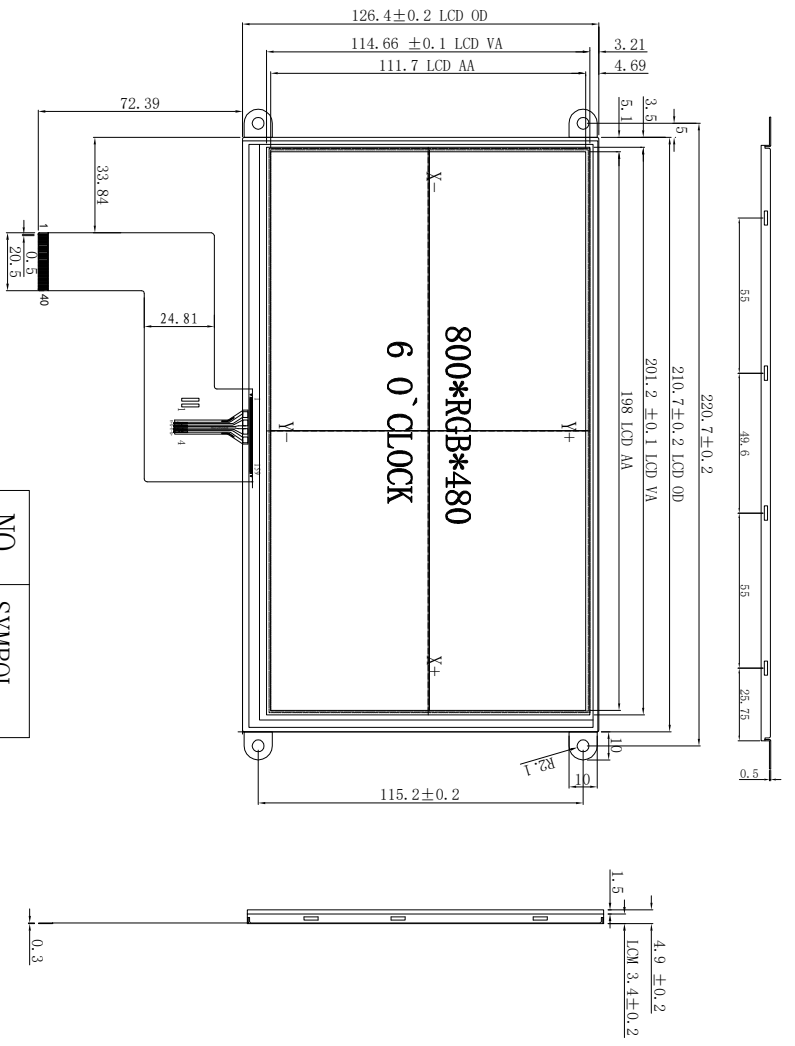


NO.	SYMBOL
1	Y+
2	X-
3	Y-
4	X+

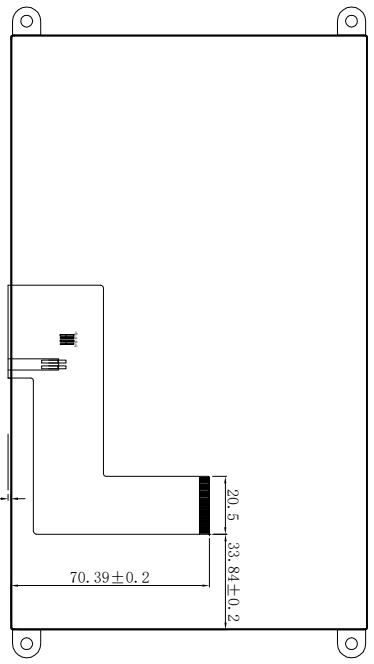

1	LED-
2	LED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DECLK
31	DISP
32	HS
33	VS
34	DE
35	NC
36	GND
37	XR(X+)/NC
38	YD(Y-)/NC
39	XI(X-)/NC
40	YI(Y+)/NC

- NOTES:
1. Display: CMI 9.0" WGA (TN);
 2. Driver IC;
 3. STORAGE TEMPERATURE: -30° C TO 80° C;
OPERATING TEMPERATURE: -20° C TO 70° C;
 4. BL LED: 6 CHIP-WHITE LEDS SERIES*3, IF=60mA;
LCM Brightness: 500cd/m2 (MIN), 530cd/m2 (typ);
CHROMATICITY COORDINATE: X: 0.31±0.03
Y: 0.32±0.03

CIRCUIT DIAGRAM (LED 3X11=33 dies)



5. ** CRITICAL DIMENSION: O REFERENCE DIMENSION;
6. RECOMMENDED CELLPHONE WINDOW SIZE: 0.5mm FROM LCD A.A AREA;
7. LCD warp is ≤ 0.3;
8. 偏光片上雾42%, 下雾25%.
9. 符合一级环境禁用管理物质。

UNIT: A4	SCALE: mm	SIZE: NO SCALE	PROJECT NO.	SHEET: 1/1
GENERAL TOLERANCE: ±0.2	ANGLE: 1°		PART NO.	REV: 00
DESIGNED: Alice	Date			
CHECKED: Date	Date			
APPROVED: Date	Date			